

# SKID STEER LOADERS



**Allcott Hire**  
All Equipment. All For Hire. All Areas.



**1300 ALLCOTT**  
Call Australia Wide

[www.allcotthire.com.au](http://www.allcotthire.com.au)

# S70

## SKID STEER LOADER



**Allcott Hire**  
All Equipment. All For Hire. All Areas.

### Machine Rating

Rated operating capacity (ISO 14397-1)	343 kg
Tipping load (ISO 14397-1)	686 kg
Pump capacity	37.00 L/min
System relief at quick couplers	20.7 MPa
Max. travel speed	9.8 km/h

### Engine

Make / Model	Kubota / D1005-E3B-BC-3
Fuel	Diesel
Cooling	Liquid
Max power @ 3000 RPM (SAE J1995)	16.8 kW
Torque at 2200 RPM (SAE J1349)	62.8 Nm
Number of cylinders	3
Displacement	1001 cm
Fuel tank	24.60 L

### Weights

Operating weight	1268 kg
Shipping weight (w/o bucket)	1109 kg

### Controls

Vehicle steering	Direction and speed controlled by two hand levers
Loader hydraulics tilt and lift	Separate foot pedals
Front auxiliary	Lateral movement of right-hand steering lever

### Drive System

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---

### Standard Features

Automatically activated glow plugs	Operator cab
Bob-Tach™ frame	Parking brake
Bobcat Interlock Control System (BICS)	Rear and top window
Front auxiliary hydraulics	Seat belt
High-back cushion suspension seat	Seat bar
Instrumentation	Spark arrestor muffler
Lift arm support	CE certification
23 x 5.70-12, 4-ply, Narrow tyres	Warranty: 12 months or 2000 hours (whichever occurs first)
Operating lights, front and rear	

1. Roll Over Protective Structure (ROPS) – meets requirements of SAE-J1040 and ISO 3471

### Environmental


Noise level LpA(EU Directive 2000/14/EC)	86 dB(A)
Noise level LWA(EU Directive 2000/14/EC)	97 dB(A)
Whole body vibration (ISO 2631-1)	1.29 ms
Hand-arm vibration (ISO 5349-1)	1.54 ms

### Attachments

Angle Brooms	Cutter Crushers	Landplanes	Snowblowers	Trenchers
Augers	Dirt Buckets	Miscellaneous	Snow V-Blades	Utility Blades
Backhoes	Dumping Hoppers	Pallet Fork Accessories	Soil Conditioners	Tillers
Boring Units	General Purpose Buckets	Pallet Forks, Standard	Stump Grinders	Sweepers
Breakers	Grapples, Farm - Utility	Root Grapples		
Combination Buckets	Grapples, Industrial	Scrapers		

### Dimensions

(A)	3051.0 mm	(J)	2399.0 mm
(B)	1814.0 mm	(K)	400.0 mm
(C)	25°	(L)	34°
(D)	141.0 mm	(M)	97°
(E)	722.0 mm	(N)	914.0 mm
(F)	1925.0 mm	(O)	1557.0 mm
(G)	2472.0 mm	(P)	752.0 mm
(H)	22°	(Q)	901.0 mm
(I)	1934.0 mm		

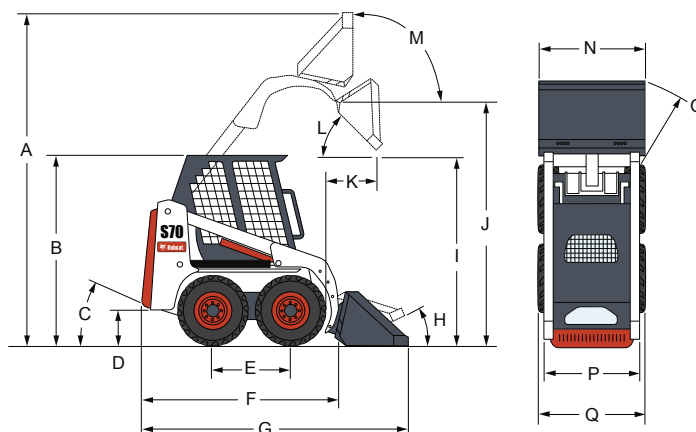

# S130

## SKID STEER LOADER



**Allcott Hire**  
All Equipment. All For Hire. All Areas.

### Machine Rating

Rated operating capacity (ISO 14397-1)	590 kg
Tipping load (ISO 14397-1)	1245 kg
Pump capacity	64.0 L/min
Max. travel speed	11.7 km/hr

### Engine

Make / Model	Kubota V2203-M-DI
Fuel	Diesel
Cooling	Liquid
Max power @ 3000 RPM (SAE J1995)	34.3 kW
Torque at 2200 RPM (SAE J1349)	150.0 Nm
Number of cylinders	4
Displacement	2194 cm <sup>3</sup>
Fuel tank	50.30L

### Weights

Operating weight	2465 kg
Shipping weight (w/o bucket)	2128 kg

### Controls

Vehicle steering	Direction and speed controlled by two hand levers
Loader hydraulics tilt and lift	Separate foot pedals
Front auxiliary	Lateral movement of right-hand steering lever

### Drive System

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---

### Standard Features

Automatically activated glow plugs	Operator cab
Bob-Tach™ frame	Parking brake
Bobcat Interlock Control System (BICS)	Rear and top window
Front auxiliary hydraulics	Seat belt
High-back cushion suspension seat	Seat bar
Instrumentation	Spark arrestor muffler
Lift arm support	CE certification
10 x 16.5, 10-Ply, Heavy Duty Tyres	Warranty: 12 months or 2000 hours (whichever occurs first)
Operating lights, front and rear	

1. Roll Over Protective Structure (ROPS) – meets requirements of SAE-J1040 and ISO 3471

### Environmental

Noise level LpA(EU Directive 2000/14/EC)	85 dB(A)
Noise level LWA(EU Directive 2000/14/EC)	101 dB(A)
Whole body vibration (ISO 2631-1)	1.07 ms
Hand-arm vibration (ISO 5349-1)	2.54 ms

### Attachments

Angle Brooms	Cutter Crushers	Landplanes	Snowblowers	Trenchers
Augers	Dirt Buckets	Miscellaneous	Snow V-Blades	Utility Blades
Backhoes	Dumping Hoppers	Pallet Fork Accessories	Soil Conditioners	Tillers
Boring Units	General Purpose Buckets	Pallet Forks, Standard	Stump Grinders	Sweepers
Breakers	Grapples, Farm - Utility	Root Grapples		
Combination Buckets	Grapples, Industrial	Scrapers		

### Dimensions

(A)	3543.0 mm	(J)	2781.0 mm
(B)	1964.0 mm	(K)	575.0 mm
(C)	23°	(L)	40°
(D)	188.0 mm	(M)	96°
(E)	900.0 mm	(N)	1575.0 mm
(F)	2432.0 mm	(O)	1745.0 mm
(G)	3152.0 mm	(P)	1247.0 mm
(H)	25°	(Q)	1490.0 mm
(I)	2100.0 mm		

