

# TELESCOPIC BOOM LIFT



**Allcott Hire**  
All Equipment. All for Hire. All Areas.

660SJ



Proportional controller for lift and lower and boom swing give smooth control

One handed operation for operator comfort and control. Proportional drive controller, gives smooth control

Jib boom and basket rotate allow additional functionality and access to hard to reach positions

Straight boom function provides increased outreach and allows fast operation from ground to full height using boom lift and telescope and jib

Low maintenance steel platform with non-skid mesh floor, and side entry gate. Enclosed foot switch

Cylinder boots protect cylinder shafts from debris and contaminants

Urethane filled, puncture proof lug tyres

Deutz oil cooled engine and transmission pump to match drive and function power and performance

4 wheel steer with operator selectable individual steer function for ease of operation

Tie down and lifting lugs for ease of transport

4 wheel drive with hydraulic piston 2 speed motors, gear reduction hubs and spring applied brakes for four wheel drive traction, provides maximum traction and ease of steering

Front axle oscillates when travelling with counterweight over steer tyres, assists in accessing difficult sites

## APPLICATIONS


- Facilities maintenance
- Electricians
- Plumbers
- All maintenance and construction work.
- Factory fit outs before electrical power is connected
- Ideal tilt up panel installation
- Steel building installation
- Steel cladding contractors

# TELESCOPIC BOOM LIFT



**Allcott Hire**  
All Equipment. All for Hire. All Areas.

460SJ

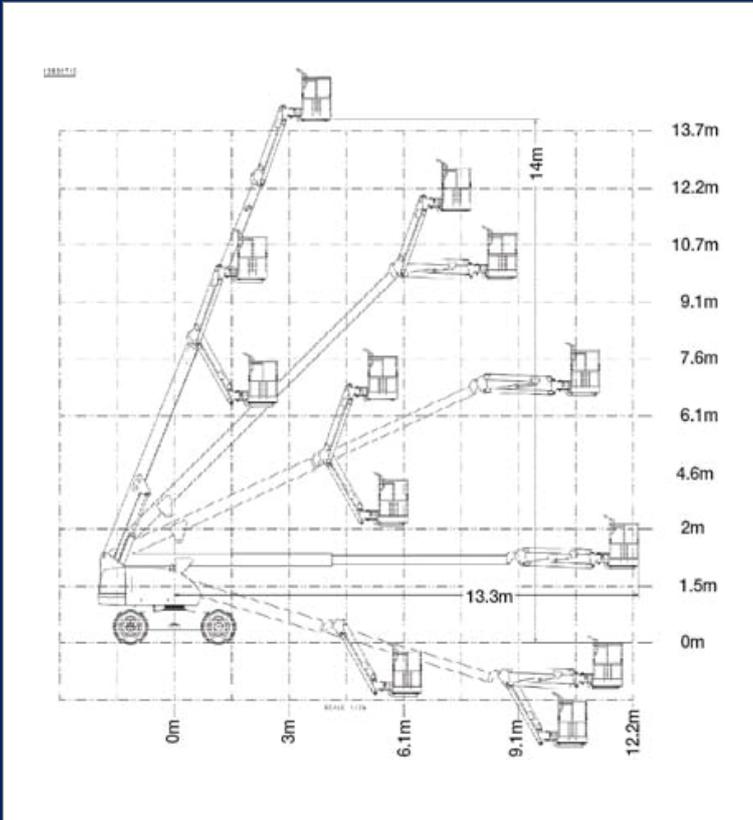

## QUESTIONS TO ASK

- What are the ground conditions in the work area?
- What are the site conditions travelling around the site?
- What is the working height needed for the job?
- What is the outreach required for the job?
- Do you need an extension lead outlet in the platform?
- Will inbuilt Miller 5.5KvA generator make the job easier?

## KEY SELLING POINTS

- Smooth control, proportional hydraulic 4 wheel drive, with two speed ranges
- Proportional lift and swing controls at the platform
- Oscillating front steer axle with the boom within 10 degrees of centre, assists 4 wheel drive traction
- Jib boom and basket rotate
- Cylinder boots protect cylinder rods from overspray and contaminants
- Lug pattern urethane filled tyres
- Multi axis 4 degree level sensor
- Plug in JLG analyser at platform and base to indicate system functions for servicing and adjustment
- Perkins 404C-22 4 cylinder 2.216 litre diesel engine, 50HP/37Kw @ 2800rpm, reduces noise, vibration, emissions and runs at a slower speed to reduce fuel use

## SPECIFICATIONS

<b>Performance</b>	
Platform Height (max.)	14.02m
Working Height	16.02m
Platform Rotation Angle	180°
Jib Raise Angle	70°
Jib Lower Angle	60°
Jib Articulation Range	130°
Maximum Horizontal Outreach	12.34m
Lift Time	29 sec
Lower Time	22 sec
Platform Capacity	230kg
Slewing Angle	360°
Continuous Slew	Yes
<b>Dimensions</b>	
Stowed Length	8.84m
Stowed Height	2.39m
Overall Width	2.30m
Wheelbase	2.34m
Ground Clearance	0.32m
Platform Width	2.44m
Platform Length	0.91m
Overall Jib Length	1.83m
Tailswing	0.86m
Axle Oscillation Standard	Std
<b>Power</b>	
Power Source	Diesel
Engine Make	Perkins
Engine Model	404C-22
Engine Power	37kW
Genset	5.5KvA Miller
Auxiliary Power	12V
<b>Travel</b>	
Tyre Size	12 x 16.5
Tyre Type	Urethane Filled
Inside Turn Radius	2.01m
Outside Turn Radius	5.3m
Gradeability	45%
Drive Speed	7.2 km/h
Maximum Ground Bearing Pressure	4.06kg/cm <sup>2</sup>
<b>Weights and Capabilities</b>	
Fuel Tank Capacity	98.5 Ltr
Hydraulic Tank Capacity	159 Ltr
Operating Weight	7,930kg




# TELESCOPIC BOOM LIFT



**Allcott Hire**  
All Equipment. All for Hire. All Areas.

860SJ

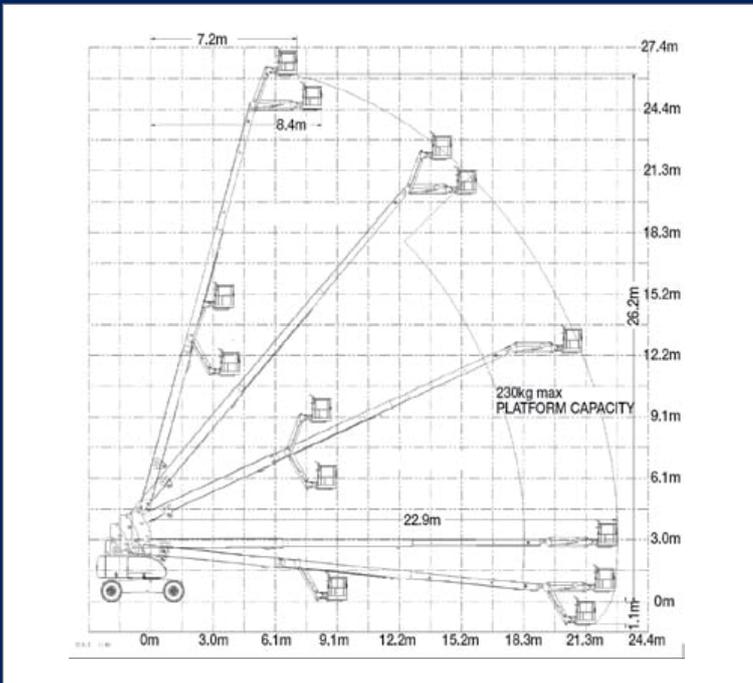

## QUESTIONS TO ASK

- What are the ground conditions in the work area?
- What are the site conditions travelling around the site?
- What is the working height needed for the job?
- What is the outreach required for the job?
- Do you need an extension lead outlet in the platform?
- Will inbuilt Miller 5.5kVA generator make the job easier?

## KEY SELLING POINTS

- Smooth control, proportional hydraulic 4 wheel drive, with two speed ranges
- Proportional lift and swing controls at the platform for fast functionality
- Oscillating front steer axle with the boom within 10 degrees of centre, assists 4 wheel drive traction
- Jib boom and basket rotate
- Cylinder boots protect cylinder rods from overspray and contaminants
- Large lug pattern urethane filled tyres
- Multi axis 4 degree level sensor
- Plug in JLG analyser at platform and base to indicate system functions for servicing and adjustment
- Deutz Engine F4M2011 5DZXL03. High speed, 4 cylinder, liquid (oil cooled), 48.5kW engine pre-glow and post-glow feature reduces emissions

## SPECIFICATIONS

Performance	
Platform Height (max.)	26.21m
Working Height	28.21m
Platform Rotation Angle	180°
Jib Raise Angle	70°
Jib Lower Angle	60°
Jib Articulation Range	130°
Maximum Horizontal Outreach	22.86m
Lift Time	56-73 sec
Lower Time	56-73 sec
Platform Capacity	230kg
Slewing Angle	360°
Continuous Slew	Yes
Dimensions	
Stowed Length	12.19m
Stowed Height	3.05m
Overall Width	2.49m
Wheelbase	3.05m
Ground Clearance	0.30m
Platform Width	2.44m
Platform Length	0.91m
Overall Jib Length	1.83m
Tailswing	1.42m
Axle Oscillation Standard	Std
Power	
Power Source	Diesel
Engine Make	Deutz
Engine Model	D2011 L04
Engine Power	48kW
Genset	5.5kVA Miller
DC Voltage	12V
DC Power	1000CCA
Genset	6kVA Miller
Auxiliary Power	12V Pump
Travel	
Tyre Size	15-625
Tyre Type	Urethane Filled
Inside Turn Radius	3.66m
Outside Turn Radius	6.86m
Drive Speed Elevated	0.8 km/h
Gradeability with 4WD	45%
Drive Speed - 4W	5.6 km/h
Maximum Ground Bearing Pressure	5.69kg/cm2
Weights and Capabilities	
Fuel Tank Capacity	117.35 Ltr
Hydraulic Tank Capacity	181.7 Ltr
Operating Weight	17,200kg